


WPDS Series LED Wall Packs

Four models: 28w, 40w, 60w and 90w

LED Conversions, Inc.

50B Northwestern Drive, Suite 10
Salem, NH 03079

Phone: 603-898-1144
Fax: 603-218-6086

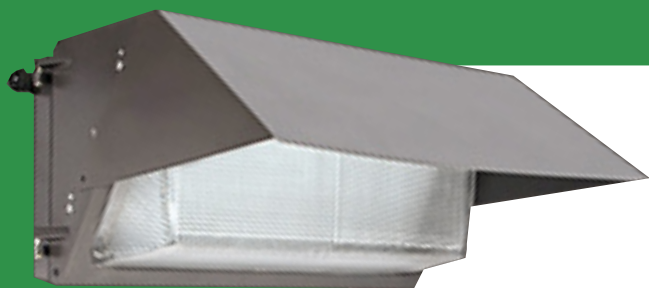

The iBright™ WPDS Series Dark Sky Compliant wall packs feature energy efficiency with a high lumen output best suited for outdoor illumination. With effective thermal management, and a corrosion-resistant, die cast aluminum enclosure, the WPDS WallPacks offer glare free and uniform lighting all while providing a safe and comfortable visual experience.

They guarantee 60-90 percent energy savings, long life and excellent performance.

The WPDS series LED wall packs provide years and years of maintenance free service.

Features

- Up to 94,000 hours per DOE testing at 120+ lumens per watt. (lifetime varies by model)
- 5 Yr. Manufacturers registered warranty
- Maintenance Free
- Return on Investment between 18 and 40 months
- Green Product

Environmental

- Contains no Mercury or Lead
- Does not produce UV Rays

Specifications

Model	WPDS28	WPDS40	WPDS60	WPDS90
Watts	28w	40w	60w	90w
Input Voltage	100 - 277VAC	100 - 277VAC	100 - 277VAC	100 - 277VAC
Lm Efficacy	120+ Lm/W	120+ Lm/W	120+ Lm/W	120+ Lm/W
Lm Flux	3,700	5,000	8,000	11,200
CRI	80+	80+	80+	80+
Color Temp	5000k 4000k also available	5000k 4000k also available	5000k 4000k also available	5000k 4000k also available
Off-state Power	0w	0w	0w	0w
PF / THD	>0.92 / <20%	>0.92 / <20%	>0.92 / <20%	>0.92 / <20%
L70 Lifetime	94,000H	74,000H	74,000H	74,000H
Dimensions (without visor)	14.3 x 7.7 x 9.1	14.3 x 7.7 x 9.1	18.31 x 9.6 x 9.1	18.31 x 9.6 x 9.1

- Environment: Indoor and outdoor use
- Operating Temperature: -4°F - 122°F
- IP Rating: IP65
- Finish Color: Bronze
- Housing: Die cast aluminum
- Lens type: Prismatic glass
- Available Dual Function Sensors: Motion & Photocell
- Dusk-To-Dawn Occupancy Control Compatible
- 0-10V Dimming Title 24 Compliant
- Warranty: 5 years

